



**(800) 550-3325**

# SNAPJACK



**Height** - 1/2"

**Static Load** - 8,800 lbs

**Support** - Surface supported by 64 Legs

**Locks** - 16 latch locks; 4 sides w/2 male Parts;  
4 sides w/2 female parts

**Flammability** - Meets UL94-HB standards

**Material** - High Impact Polypropylene

**Fungus & Mildew Resistant** - Yes


**Service Range** - -30° to +170°

**Phone:** (800) 550-3325

**Email:** [support@coverdeck.com](mailto:support@coverdeck.com)

**Address:** 408 A Meco Drive,  
Wilmington, Delaware 19804

[www.coverdeck.com](http://www.coverdeck.com)

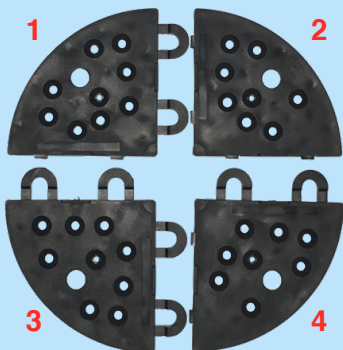


**Top View**

(Disconnected Into 4 Pieces)

Each Corner Engraved with Numbers



**Side View**

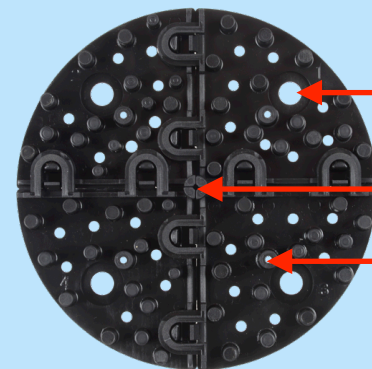

**Bottom View**

(4 Corners #1,#2,#3,#4  
Snapped Together)

Plastic  
Peg Slot

Washer &  
Screw Slot

Screw Slot

# SNAPJACK

## Snapjack With Deckstone Porcelain Panels

**Polyurethane Adhesive**  
(Applied to Top Surface  
of Snapjack)



## WOOD FRAME



## EXISTING WOOD DECK




## CONCRETE PATIO



## Snapjack With Wood Structural Panels


**Plastic Peg**

**Screw 1/2"**  
(Screw to Panel if  
Desired)

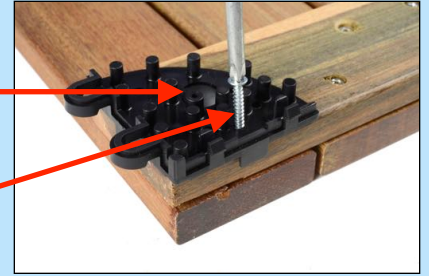

**Washer & Screw 7/8"**  
(For Wind Lift Support)

**Protection  
Mat**

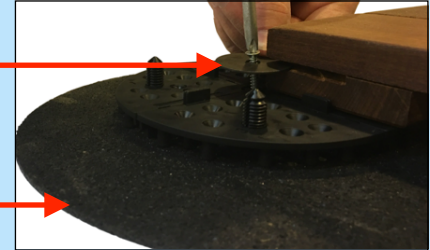

## Available Accessories

**Protection Mat**

3.2 mm Thick 9 in. Diameter



**Plastic Peg**



(For Use with Wood Structural Panels) Used to  
Secure and Position Panels

**Screw 1/2"**



(For Use with Wood Structural Panels) Used for  
Stacking and Screwing to Panels if Desired

**Washer &  
Screw 7/8"**



(For Use with Wood Structural Panels) Provides  
Wind Lift Support

**Polyurethane  
Adhesive**



(For Use with Porcelain Structural Panels) Creates  
Bond Between Porcelain and Snapjack

