



COVERDECK® SYSTEMS

TECHNICAL DATA SHEET




PEDESTAL



SEO

CODE
E240028038

REV 00
27.06.2013



ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD

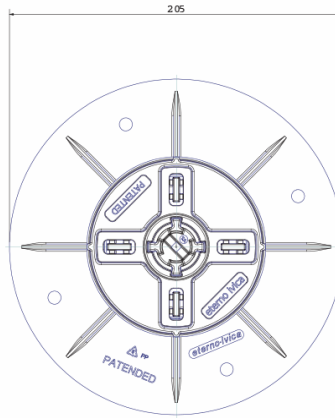

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 28mm to 38mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 pre-cut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 0

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	28	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	38	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,260	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	19,93
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	11,61
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaeva Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	50
PIECES PER PALLET	30
BOX DIMENSION	cm 40x40x42
BOX WEIGHT	kg 13,825
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK® SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE1

CODE
E240037050

REV 00
27.06.2013

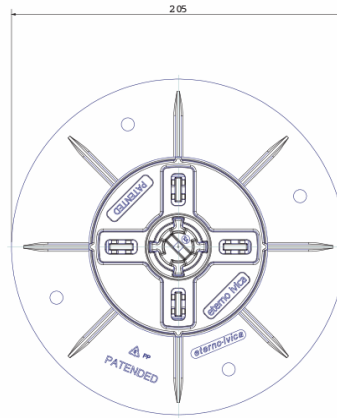

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 37,5mm to 50mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 1

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	37,5	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	50	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,320	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	16,06
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	11,49
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaea Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	50
PIECES PER PALLET	30
BOX DIMENSION	cm 40x40x42
BOX WEIGHT	kg 13,6
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK® SYSTEMS TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE2

CODE
E240050075

REV 00
27.06.2013

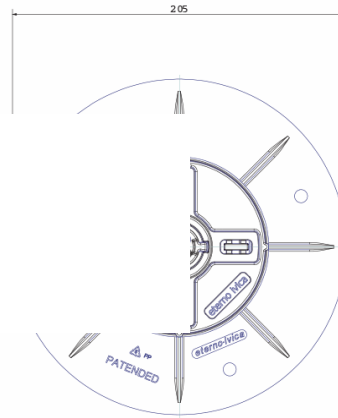

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 50mm to 75mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205mm diameter for resting on the laying surface, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12mm in 2, 3 or 4mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 2

CHARACTERISTICS

Adjustable in height. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	50	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	75	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,352	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	16,47
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	14,04
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaea Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	30
PIECES PER PALLET	30
BOX DIMENSION	cm 40x40x42
BOX WEIGHT	kg 11,4
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK® SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE3

CODE
E240075120

REV 00
27.06.2013

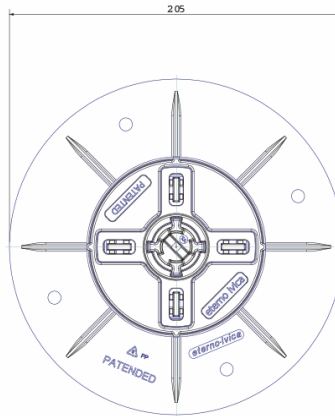

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 75mm to 120mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 3

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	75	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	120	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	Kg	0,458	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	19,55
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	15,23
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaea Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	n° 30
PIECES PER PALLET	n° 20
BOX DIMENSION	cm 39,5x60x42,5
BOX WEIGHT	kg 14,7
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK® SYSTEMS TECHNICAL DATA SHEET



PEDESTAL



SE 4

CODE
E240120170

REV 00
27.06.2013



ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD

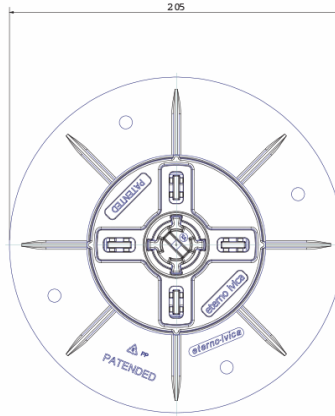

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 120mm to 170mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 4

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	120	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	170	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,518	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	20,98
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	17,84
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaea Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25
PIECES PER PALLET	20
BOX DIMENSION	cm 39,5x60x42,5
BOX WEIGHT	kg 14
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK[®]

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 5

CODE
E240170215

REV 00
27.06.2013

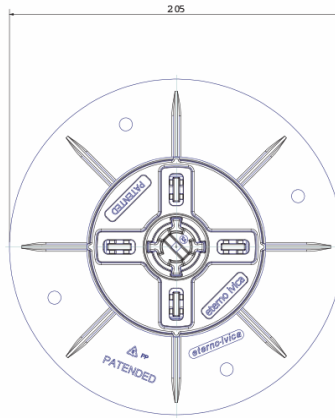

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 170mm to 215mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 5

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	170	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	215	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,609	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	18,67
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	14,62
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaea Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25
PIECES PER PALLET	20
BOX DIMENSION	cm 39,5x60x42,5
BOX WEIGHT	kg 16,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK®

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 6

CODE
E240140230

REV 00
27.06.2013

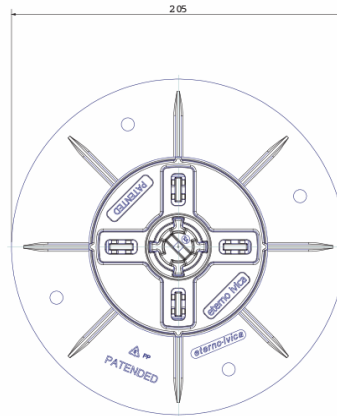

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 140mm to 230mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, one extension element, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 6

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	140	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	230	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,694	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	16,30
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	10,71
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaia Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	30 SE3 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 14,7 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK®

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 7

CODE
E240185275

REV 00
27.06.2013

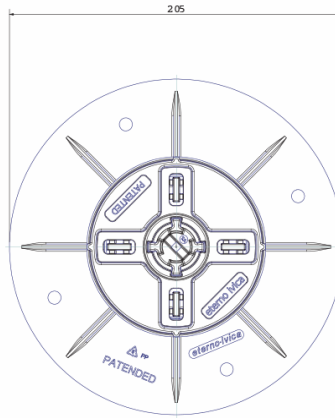

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 185mm to 275mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, one extension element, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 7

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	185	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	275	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,754	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	16,14
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	12,28
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaia Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25 SE4 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 14,0 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK®

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 8

CODE
E240235325

REV 00
27.06.2013

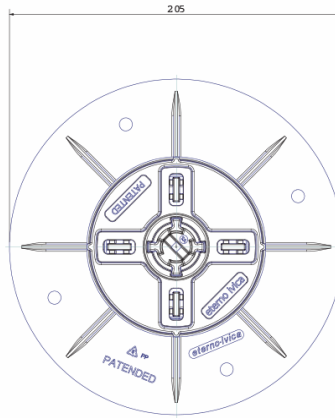

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 235mm to 325mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, one extension element, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 8

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	235	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	325	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,845	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	15,02
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	12,68
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaeta Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25 SE5 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 16,2 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK®

SYSTEMS

TECHNICAL DATA SHEET



PEDESTAL



SE 9

CODE
E240205345

REV 00
27.06.2013



ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD

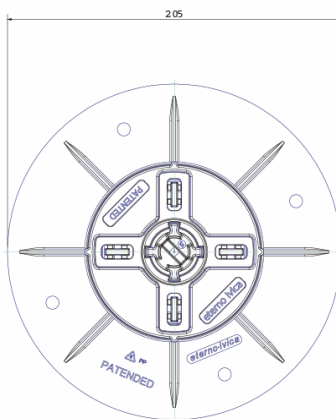

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 205mm to 345mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, two extension elements, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 9

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	205	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	345	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,93	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	15,32
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	11,01
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaia Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	30 SE3 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 14,7 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK®

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 10

CODE
E240250385

REV 00
27.06.2013

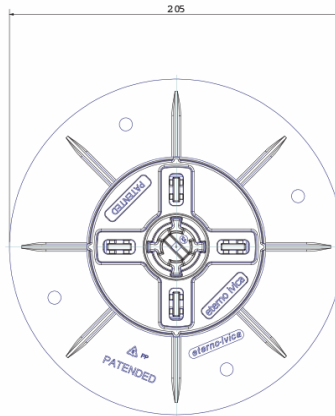

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 250mm to 385mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, two extension elements, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 10

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	250	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	385	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	0,99	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	14,96
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	12,30
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaeta Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25 SE4 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 14 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK[®]

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 11

CODE
E240300400

REV 00
27.06.2013

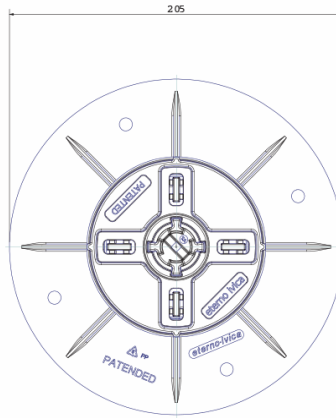

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 300mm to 400mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, two extension elements, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 11

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	300	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	400	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	1,08	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	15,02
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	13,81
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaeta Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25 SE5 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 16,2 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK[®]

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 12

CODE
E240270455

REV 00
27.06.2013

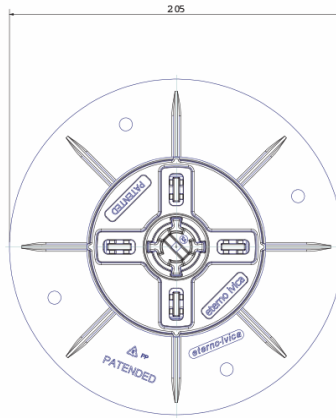

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 270mm to 455mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, three extension elements, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 12

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	270	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	455	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	1,17	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	15,85
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	11,13
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaia Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	30 SE3 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 14,7 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK®

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 13

CODE
E240315500

REV 00
27.06.2013

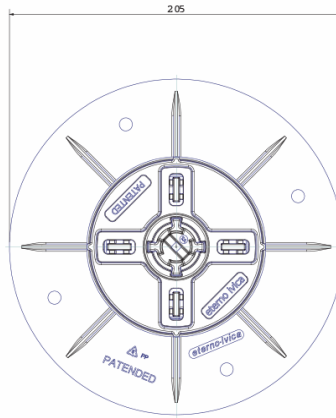

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 315mm to 500mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, three extension elements, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 13

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	315	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	500	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	1,23	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	15,22
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	12,04
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaia Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25 SE4 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 14 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing



COVERDECK®

SYSTEMS

TECHNICAL DATA SHEET

ETERNO ADJUSTABLE PAVING SUPPORT WITH SELF LEVELING HEAD





PEDESTAL

SE 14

CODE
E240365550

REV 00
27.06.2013

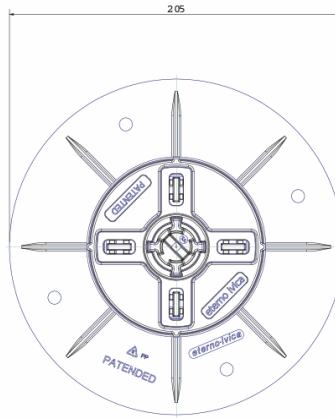

ITEM SPECIFICATION

"Eterno" type pedestal for raised floors with adjustable height from 365mm to 550mm, provided of bi-component self levelling head with anti noise and anti slip rubber on top. Pedestals are composed by a cylindrical base element of 205 mm diameter for resting on the laying surface, three extension elements, an intermediate screw with a locking security system, and a top head element with 4 easy removable tabs of h.12 mm in 2, 3 or 4 mm thickness. Base is provided of holes for water drainage and of 4 precut lines to facilitate any cutting of the base in case of need. Adjustment in highness is made with the exclusive regulation key that connects with the screw, as it is independent from both base and head.

PRODUCT RANGE

PEDESTAL

PRODUCT NAME

SE 14

CHARACTERISTICS

Adjustable in highness. Bicomponent material (PP and rubber) self leveling head.

Regulation key for highness adjustment

Easy removable tabs

Security lock system to prevent unlocking.

RAW MATERIAL

Polypropylene and rubber (head top finishing)

ENVIRONMENTAL IMPACT

recyclable material - non dangerous



APPLICATIONS SURFACES

On any waterproofing membrane, or any insulating panel or any compact and solid surface

APPLICATIONS AREA

Usable with any prefabricated self sustaining element for exterior flooring

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	110	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- cmq 5
MINIMUM HEIGHNESS	mm	365	+/- mm 1,0
MAXIMUM HEIGHNESS	mm	550	+/- mm 1,5
TABS THICKNESS	mm	2-3-4	+/- mm 0,2
TABS HIGHNESS	mm	12	+/- mm 0,2
WEIGHT	kg	1,32	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	16,07
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* <small>(calculated at medium highness, between minimum and maximum extension)</small>		KN	11,92
SLOPE CORRECTION		%	0 - 5
SHORE		Shore d	70 (+/- 3)

*Tests made by Civil and Environmental Department of University of Padova. 1 KN = 98,6 Kg

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE
FIRE REACTION*	UNI EN 13501-1:2009	class	E
LOW TEMPERATURES REACTION			-40°

*Tests made by Giordano S.p.A. Institute of Bellaria-Iaeta Marina (RN)-Italy

PACKAGING AND STORAGE	
PIECES PER BOX	25 SE5 + 40 prolunghe
PIECES PER PALLET	20 + 30
BOX DIMENSION	(cm 39,5x60x42,5)+(cm 40x40x42)
BOX WEIGHT	kg 16,2 + 10,2
PALLET DIMENSION	cm 80 x 120

The packing of the supports is made of boxes. The final pallets are wrapped with a polyethylene film. We recommend to store indoor, pallets to be protected from the rain.

LAYING OF THE PRODUCT	
	The product is simply laid on the laying area, with no need of any glue or fixing