

## COVERTRAC



**Dimensions:** 4' x 4'

Thickness: 2 3/4"

Panel Weight: 48lbs


If you need a portable roadway for access into sensitive areas, you're looking for CoverTrac. With over 25,000 Lbs per square foot load capacity on bearing ground, it will not only hold those forklifts and trucks, but will protect the ground they're driving on.

CoverTrac can also be easily welded and repaired. No more throwing away wood that has holes from stakes and electrical. The hot air welder is easy to use and runs on a 110v circuit. Repairs can be done in the field or in the off-season. CoverTrac will sell various size plugs for those repairs.

## APPLICATIONS

- Music Concerts
- Festivals
- Commencement and Graduation Ceremonies
- Exhibitions and Trade shows
- Corporate/Private Events

No matter if you are hosting a large-scale event or a small gathering, Covertrac is designed to protect your site from damage while keep your guests' safe and secure.

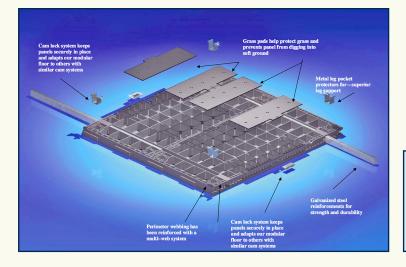

## **FEATURES**

- Load Capacity | Designed to handle the following loads: 25,000 Lbs per square foot on bearing ground and 1,000 Lbs. per square foot elevated
- Flame Resistance | Exceeds UL94HB (Test results available on request)
- **Cleaning** | High or medium pressure wash. Detergents and anti-bacterial agents may be used.
- Install Rate | 2500|square ft. per hr. (4 persons)
- Temperature Range | -10 to 110 degrees Fahrenheit
- **Recovery Rate** | 3500 square ft. per hr. (3 persons)
- Corrosion Resistance | Excellent
- Suitable Surfaces | Turf, Soil, Sand, Gravel, Snow, Tarmac & Concrete.
  Engineering personnel should survey all surfaces prior to deployment
- **Slip Resistance** | The textured top provides excellent slip resistance
- Chemical Resistance | Solvent resistant with good chemical resistance
- Stress & Crack Resistance | High Elastymer Stress and Crack Resistant
- Impact Resistance | High Impact





Phone: (800) 550-3325 / (302) 427-7578

Email: support@coverdeck.com

Website: www.coverdeck.com

